

REB

ELECTRIC CONVECTION OVEN FOR PASTRY

REB 044 / 054 M



4 / 5 x (60 x 40)

COOKING AND OPERATING MODES

- Convection 70 - 300°C
- Timed
- Continuous

CONTROL FUNCTIONS

- Electromechanical with manual control
- Selector temperature adjustable from 70 - 300°C
- Selector cooking time programmable up to 120 minutes, with warning buzzer at end of cooking time
- Autoreverse (automatic reversal of fan rotation)
- Standard manual humidifier
- Cavity vent
- Cavity lights
- IPX3 water protection
- Connection for energy saving system SN (optional)

STANDARD EQUIPMENT

- Side runners

OPTIONAL - TO BE REQUESTED WHEN ORDERING OVEN

- SN - Extra charge for energy saving system connection
- RPS - Right hinged door

CONSTRUCTION DETAILS

- Stainless steel cooking compartment with long radius rounded corners for a perfect cleaning
- Cooking compartment 25 mm thermic insulation
- Double glazed door with large air interspace and inner heat reflecting type of glass for a perfect heat insulation and better efficiency
- Hinged inner glass for perfect cleaning
- Double opening door handle
- Oven front panel seal made with heat and age resistant silicon rubber
- Opening fan protection cover for a proper cleaning of fan wheel



ELECTRIC HEATING SYSTEM

- Cooking compartment heating elements of armoured INCOLOY 800 type

SAFETY FEATURES


- Cooking compartment safety thermostat
- Cooking compartment safety device for pressure built-up and depression
- Fan motor thermic protection
- Mechanical door switch

ACCESSORIES

- **LD 25** - Hand shower with stainless steel hose, fittings and connections - 2,5 mt.
- **RKC 044** - Extraction hood with air-cooled condenser (900 x 1005 x 300 h - AC 230 V / 0,25 kW)
- **RKA 044** - Extraction hood without air-cooled condenser - Duct to the outside is required (900 x 1005 x 300 h - AC 230 V / 0,25 kW)
- **RNR 044** - Installation frame for hood (230 h)
- **RSR 074** - Stainless steel floor stand (900 x 660 x 850 h)
- **RSP 074** - Stainless steel floor stand with side runners (900 x 660 x 850 h - 8 x 600 x 400)
- **RAU 074** - Stainless steel holding cabinet with electromechanical controls, humidifier and side runners (900 x 660 x 850 h - 8 x 600 x 400 - AC 230 V / 2,6 kW)
- **CD 002** - Stainless steel trolley to hold complete washing system - Capacity 2 tanks of 10 lt.
- Two step locking mechanism for safety
- Special and marine voltages

- **DL010** - *Combiclean - Alkaline cleanser (tank 10 l.)*

REB 044 / 054 M



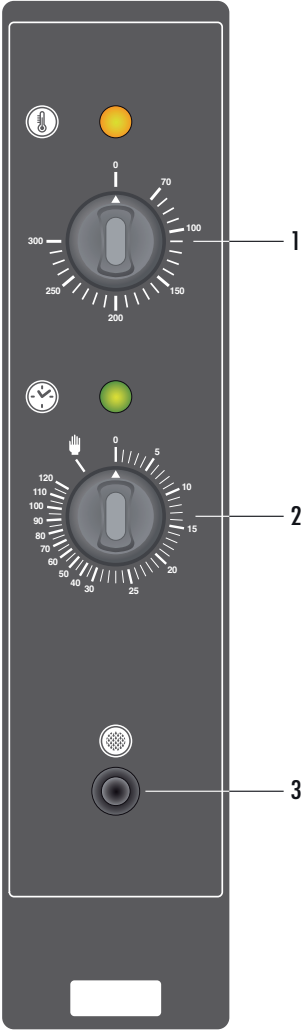


- 1 - Main switch and knob for setting cavity temperature
- 2 - Cooking timer knob
- 3 - Manual humidifier key

TECHNICAL DATA		REB 044 / 054 M
External dimensions	mm	900 x 715 x 595 h
Dimensions with packing	mm	980 x 816 x 775
Weight - Gross / Net	Kg	71 / 62
Total electric power	kW	7,25
Chamber heating output	kW	7
Fan power	kW	0,2
Power supply voltage	V	3N AC 400 V - 50 Hz

CAPACITY (60 x 40)	Distance between layers (mm)
mod. 044 - 4 x (60 x 40)	- 95 mm
mod. 054 - 5 x (60 x 40)	- 75 mm

REB 044 / 054 M

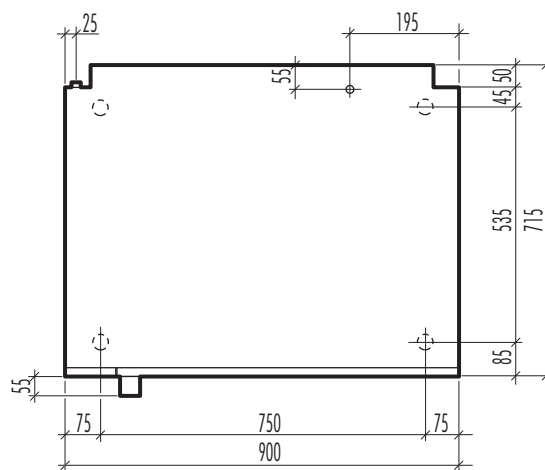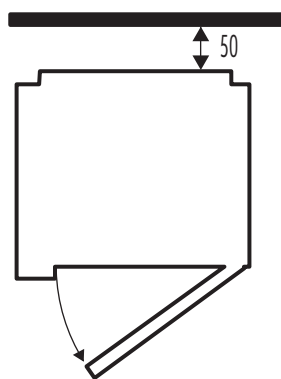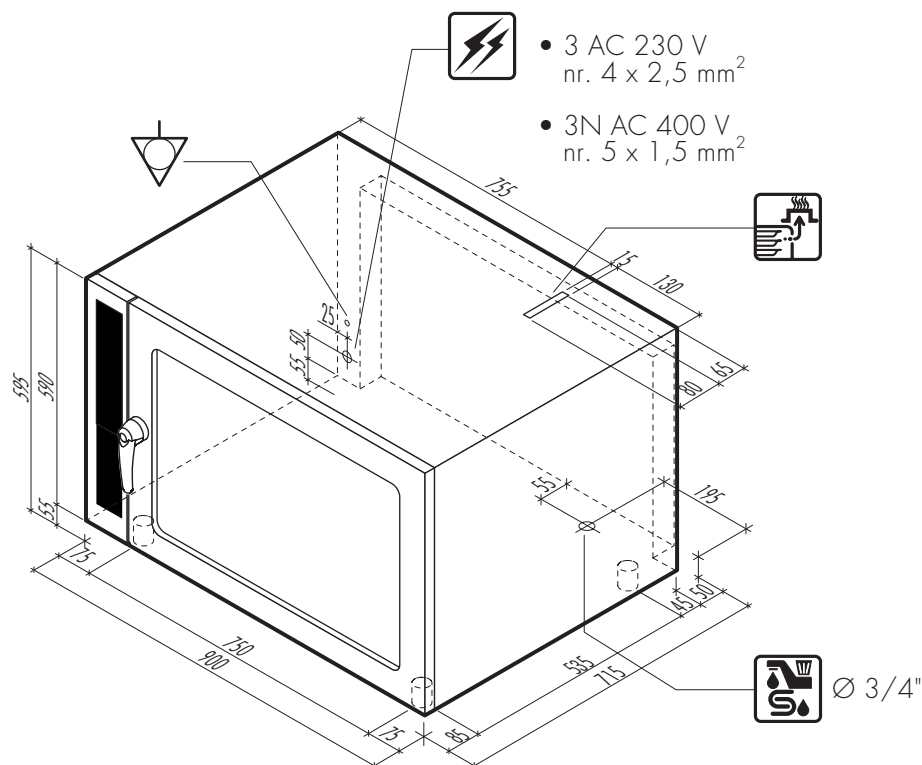

Electric power supply cable inlet



Boiler descaling cap



Air extraction



Liquid outlet



Gas inlet and type of thread



Steam vent and chamber pressure drop safety device



Normal water inlet



Steam trap



Flue pipe



Oven steam vent



Softened water inlet

