

REB

ELECTRIC CONVECTION OVEN FOR PASTRY

REB 064 / 074 M



6 / 7 x (60 x 40)

COOKING AND OPERATING MODES

- Convection 70 - 300°C
- Timed
- Continuous

CONTROL FUNCTIONS

- Electromechanical with manual control
- Selector temperature adjustable from 70 - 300°C
- Selector cooking time programmable up to 120 minutes, with warning buzzer at end of cooking time
- Autoreverse (automatic reversal of fan rotation)
- Standard manual humidifier
- Cavity vent
- Cavity lights
- IPX3 water protection
- Connection for energy saving system SN (optional)

STANDARD EQUIPMENT

- Side runners

OPTIONAL - TO BE REQUESTED WHEN ORDERING OVEN

- SN - Extra charge for energy saving system connection
- RPS - Right hinged door

CONSTRUCTION DETAILS

- Stainless steel cooking compartment with long radius rounded corners for a perfect cleaning
- Cooking compartment 25 mm thermic insulation
- Double glazed door with large air interspace and inner heat reflecting type of glass for a perfect heat insulation and better efficiency
- Hinged inner glass for perfect cleaning
- Double opening door handle
- Oven front panel seal made with heat and age resistant silicon rubber
- Opening fan protection cover for a proper cleaning of fan wheel



ELECTRIC HEATING SYSTEM

- Cooking compartment heating elements of armoured INCOLOY 800 type

SAFETY FEATURES


- Cooking compartment safety thermostat
- Cooking compartment safety device for pressure built-up and depression
- Fan motor thermic protection
- Mechanical door switch

ACCESSORIES

- **LD 25** - Hand shower with stainless steel hose, fittings and connections - 2,5 mt.
- **RKC 044** - Extraction hood with air-cooled condenser (900 x 1005 x 300 h - AC 230 V / 0,25 kW)
- **RKA 044** - Extraction hood without air-cooled condenser - Duct to the outside is required (900 x 1005 x 300 h - AC 230 V / 0,25 kW)
- **RNR 064** - Installation frame for hood (110 h)
- **RSR 074** - Stainless steel floor stand (900 x 660 x 850 h)
- **RSP 074** - Stainless steel floor stand with side runners (900 x 660 x 850 h - 8 x 600 x 400)
- **RAU 074** - Stainless steel holding cabinet with electromechanical controls, humidifier and side runners (900 x 660 x 850 h - 8 x 600 x 400 - AC 230 V / 2,6 kW)
- **CD 002** - Stainless steel trolley to hold complete washing system - Capacity 2 tanks of 10 lt.
- Two step locking mechanism for safety
- Special and marine voltages

- **DL010** - *Combiclean - Alkaline cleanser (tank 10 l.)*

REB 064 / 074 M

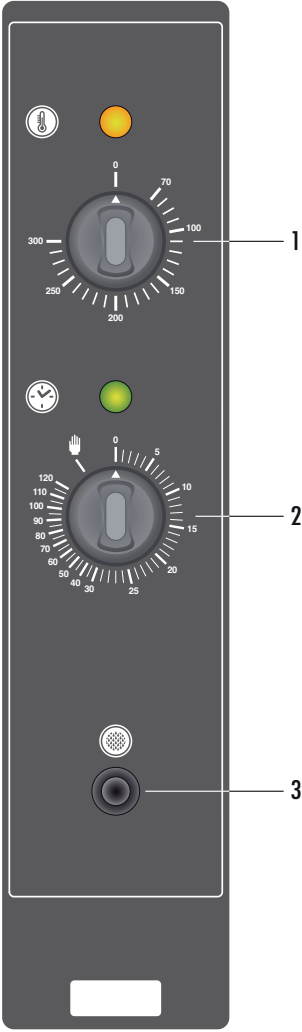

- 1 - Main switch and knob for setting cavity temperature
- 2 - Cooking timer knob
- 3 - Manual humidifier key

TECHNICAL DATA		REB 064 / 074 M
External dimensions	mm	900 x 715 x 760 h
Dimensions with packing	mm	980 x 820 x 940 h
Weight - Gross / Net	Kg	93 / 83
Total electric power	kW	12,5
Chamber heating output	kW	12
Fan power	kW	0,4
Power supply voltage	V	3N AC 400 V - 50 Hz

CAPACITY (60 x 40)	Distance between layers (mm)
mod. 064 - 6 x (60 x 40)	- 90 mm
mod. 074 - 7 x (60 x 40)	- 75 mm

REB 064 / 074 M

